

Model KVA25

KVA oil-flooded, multi-vane vacuum pumps are single stage, air cooled and direct driven. This simple design ensures the reliability and the durability that is required in the vacuum industry.

Improved Performance

The performance of the KVA rotary vane vacuum pump has been optimized to provide even deeper vacuum levels than before. Most models can achieve ultimate pressure levels near 0.1 mbar.

Rugged and Reliable

Kinney has built a global reputation for having some of the most rugged and reliable equipment in the industry. The KVA rotary vane vacuum pump is no exception and has many years of proven application experience.

Custom Engineered Systems

Kinney has a knowledgeable team of vacuum application experts who will work with you to design a vane pump vacuum system that is tailored to your specific needs.

Easy to Maintain and Operate

The KVA has been engineered to provide convenient service access to both the oil and filters. Its direct-coupled and air-cooled design requires very little additional maintenance.

Compact and Quiet

The small footprint of the KVA pump allows for maximized tabletop and floor space. A smooth and quiet operation can be expected due to the intentional pump design and vibration isolation.



Features

- Non-metallic vanes
- Oil level sight glass
- Vibration isolators
- Anti-suck back valve
- Integral exhaust filters
- TEFC high efficiency motor
- Available with single-phase motors
- Models KVA 25-630 include spin-on oil filter
- Drop-in replacements for Busch R 5 Series™* Vane Pumps


Specifications Table

NOMINAL DISPLACEMENT	60 Hz	CFM	21
	50 Hz		18
	60 Hz	m³/h	36
	50 Hz		30
ULTIMATE PRESSURE	Torr		0.12
	mbar		0.16
MOTOR	3 Phase	Нр	1.5
ROTATIONAL SPEED	60 Hz		1740
NOISE LEVEL	dba	60Hz	67
OIL CAPACITY	Quarts		1.5
	Liters		1.4
CONNECTIONS	Inlet NPT		1 1/4"
	Outlet NPT		1 1/4"
APPROX. WEIGHT (with pump & motor, no oil)	lbs.		104
	kg		47

^{*} R 5 series is a trademark of Busch, Inc.


Dimensions

Values shown are approximate and should not be used for construction. Certified drawings are available through your local Kinney Professional. All dimensions are shown in inches and millimeters.

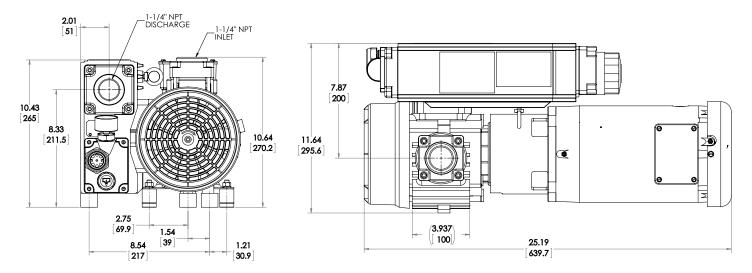

5.28 134 4.17 106 30 7.5 7.20 183 212

Performance Curve



CONTACT US

For more information, contact your Regional Sales Manager or call us at:

1-800-825-6937

Your Local Sales Professional:

WWW.KINNEYVACUUM.COM K-CS-KVA25 1st Ed. 3/21